

# PIC HS

## Luminaire: Followspot, halogen, 1000W zoom 14°-23°-37°, GX9.5



### Type

Conventional line

### Family

Followspot

### Source

Halogen

### Power

650W 1000W

### Connectors

Cable without plug

### Lamp holder

GX9.5

### Voltage

220-240V, 50-60Hz

### Product sizes

6.6Kg

### Pack sizes

7.4Kg


### User manual

Available on website


### Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Filter frame lockable top cover
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing
- Easy access to the lamphouse for fast maintenance
- 99,99% polished and treated aluminum reflector

### Sizes (in mm)

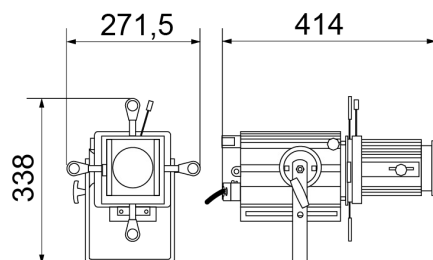

### Light output diagram



### Accessories

BS

Acc: Low stand, DIN, lazy leg

DIN P 10

Acc: TV spigot / M10 adapter with plate

FUNE

Acc: Safety net with spring hook

RF

Acc: Wheel set with brake

TC MINI

Acc: Colour frame

TD MINI

Acc: Colour frame micro

### LED equivalents

VD LED 250 CW DMX

Luminaire: Followspot, LED, 250W, CW

VD LED 250 RGBW DMX

Luminaire: Followspot, LED, 250W, RGBW

VD LED 250 WW DMX

Luminaire: Followspot, LED, 250W, WW